

Type	Description
0	without fasteners
1	with 4 U-bolts M12 for UNP 140 upright
2	with 4 bolts M16 x 40

Note

Support 7511 onw

A = Axis of operating rod

Associated parts

Connecting clamp 7151

Operating rod 7311 / 7321

Stroke length

120 mm

Weight

Wt (kg) = 40


Drawing number

564.00032, .00042, .00043

Ordering information

for UNP 140 upright

7111.01.1 Disconnecting switch 15 kV,
1600 A

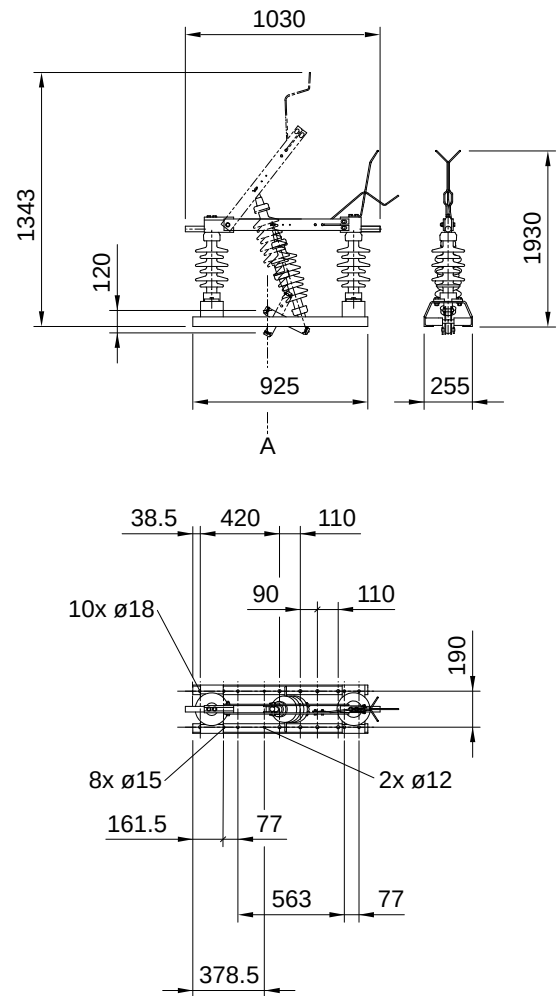

Note

A = Axis of operating rod

Stroke length

200 mm

Weight


Wt (kg) = 31

Drawing number

564.00034

Ordering information

7111.04 Disconnecting switch 15 kV

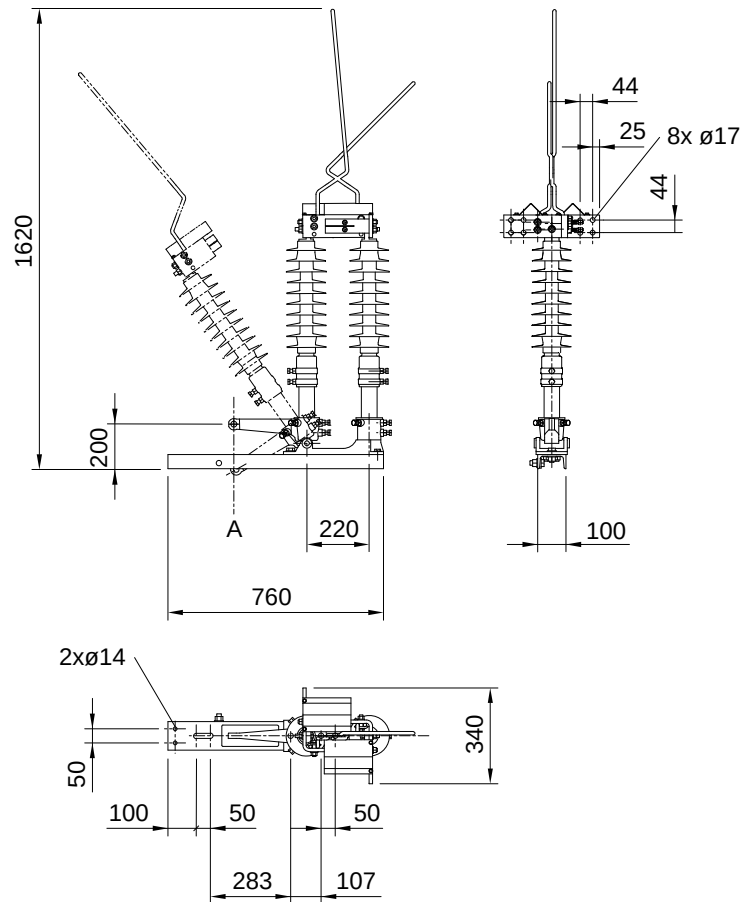
Type Description

0	without fasteners
1	with 4 U-bolts M12 for UNP 140 upright
2	with 4 bolts M16 x 40

Note

Support 7511 onw

A = Axis of operating rod

Associated parts

Connecting clamp 7151

Operating rod 7311 / 7321

Stroke length

120 mm

Weight


Wt (kg) = 80

Drawing number

564.00064, .00194, .00197

Ordering information

without fasteners

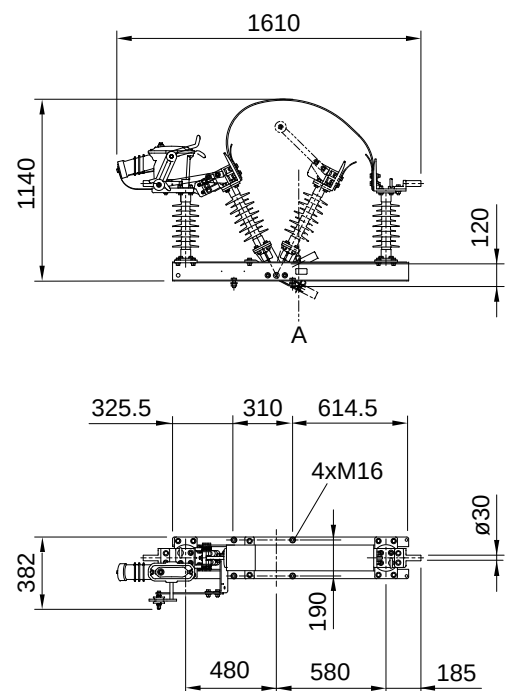7112.01.0 Load disconnector switch with
vacuum quenching chamber 15 kV,
2000 A


Note

A = Axis of operating rod

Stroke length

200 mm

Weight


Wt (kg) = 36

Drawing number

564.00037

Ordering information

7114.04 Disconnecting switch
with earth contact 15 kV

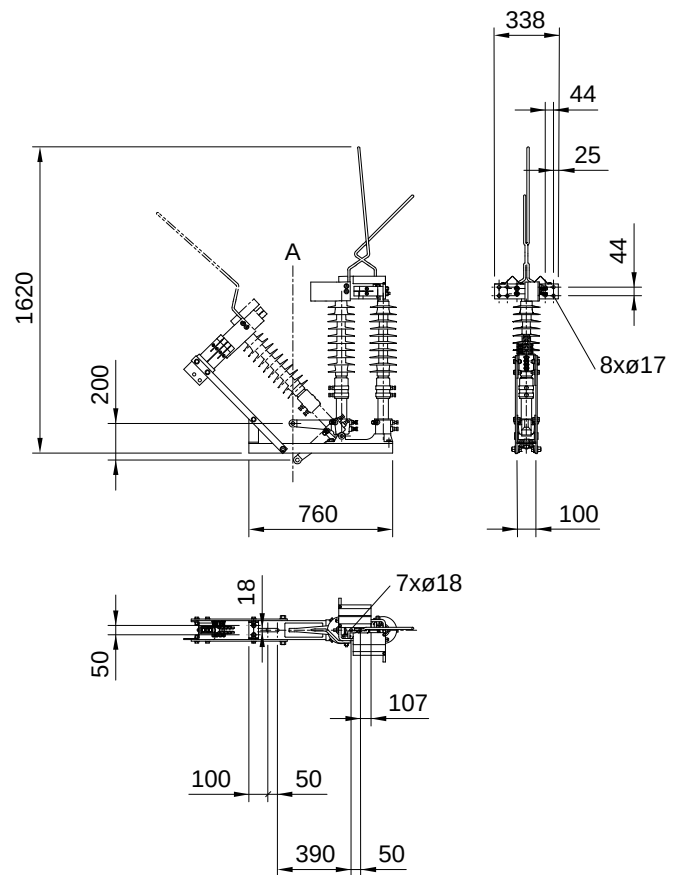

Note

A = Axis of operating rod

Stroke length

200 mm

Weight


Wt (kg) = 33

Drawing number

564.00038

Ordering information

7115.04 Earthing switch 15 kV

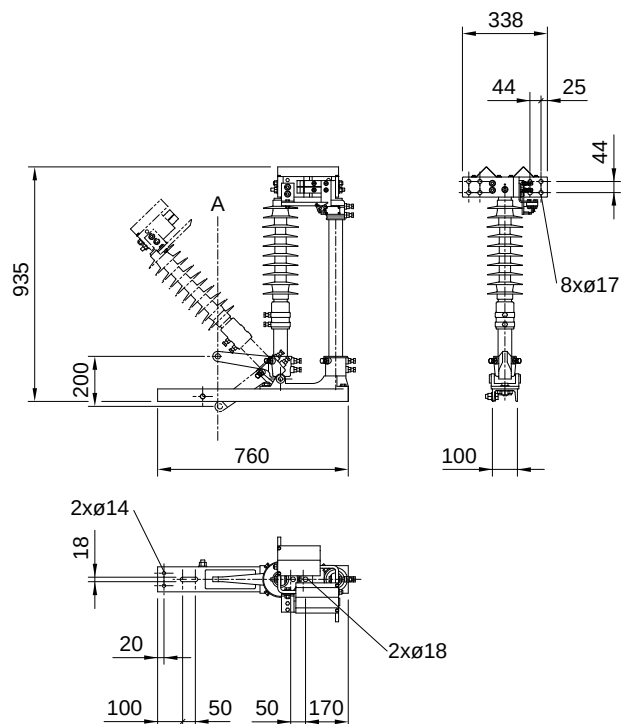

Type	Motor Voltage
110	110 V DC
230	230 V AC

Note

Motor drive is included

Weight

Wt (kg) = 35


Drawing number

564.00035

Ordering information

with 110 V DC Motor voltage

7116.03.110 V DC Single-pole indoor earthing switch 15 kV

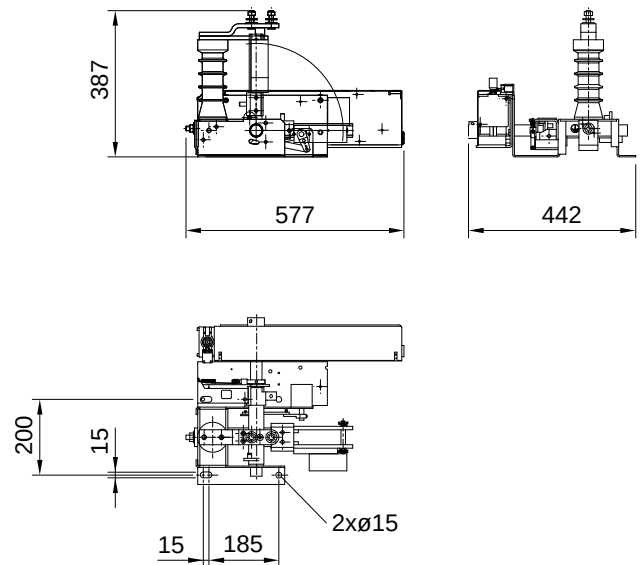

Type	Description
0	without fasteners
1	with fastening plate 7545 at sectioning point
2	with 4 bolts M12 x 40

Note

Support 7541 onw

A = Axis of operating rod

Associated parts

Operating tube 7311 / 7321

Stroke length

120 mm

Weight

Wt (kg) = 27


Drawing number

564.00026, .00044, .00045

Ordering information

without fasteners

7131.01.0 Disconnecting switch 3,6 kV, 3400 A

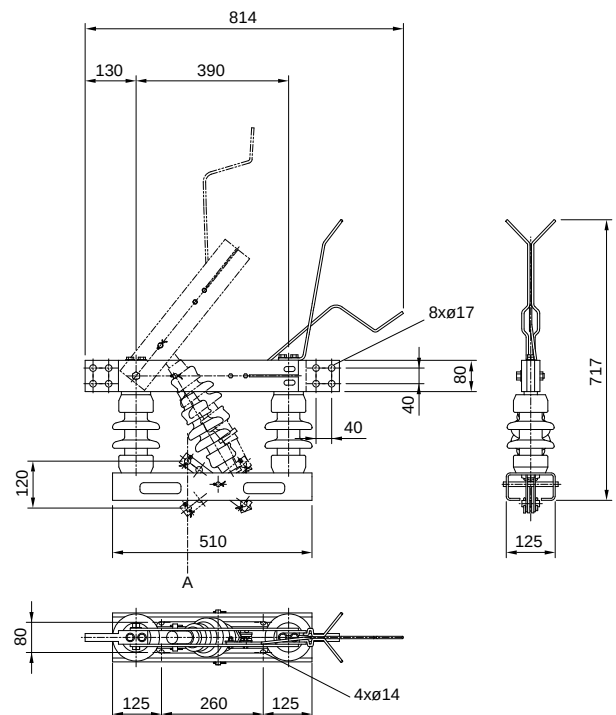


Type	Current (A)	Wt (kg)
1	3000	28.0
2	4000	38.5

Stroke length
200 mm

Drawing number
564.00134, .00141

Ordering information
Current 3000 A
7131.04.1 Disconnecting switch 3 kV, 3000 A

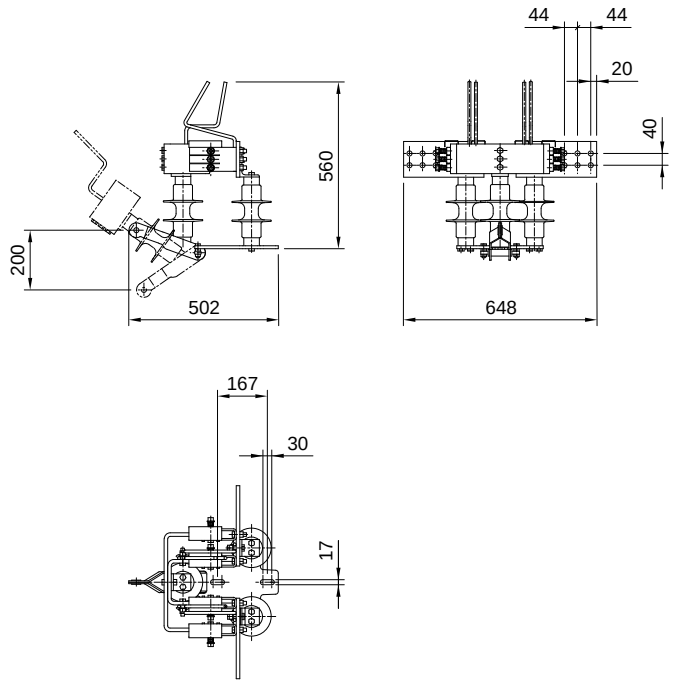

Note

Motor drive 230 V AC is included

Weight


Wt (kg) = 43

Drawing number

564.00126

Ordering information

7146.03 Single-pole indoor earthing switch 1.5 kV

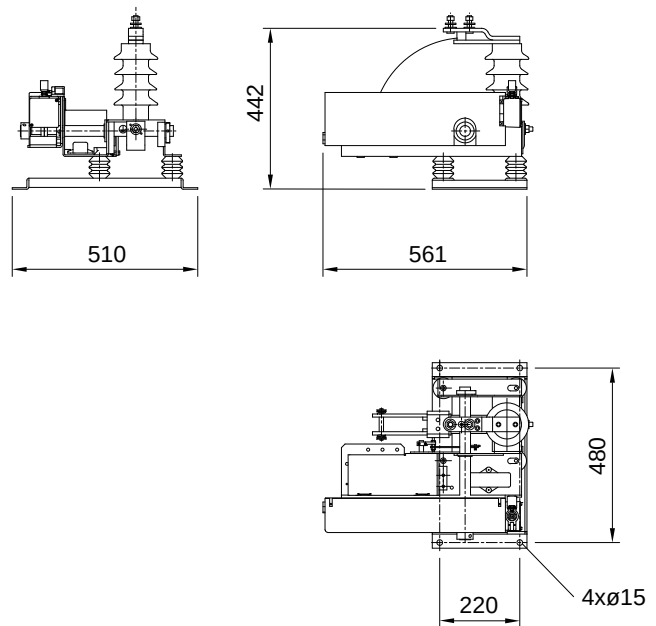Connecting clamp 1500 A, ø30 mm / 2x 95 mm² / 2x CW 107

7151

Material

Clamp: Rg5 / CuNi2Si

Bolt / washer: Fe stainless

Note

Disconnecting switch 15 kV 7111.01 onw

Other clamp range on request.

A1 = Application area 0°

A2 = Application area 90°

Connecting parts

Reducing bush for ø 20 7153


Drawing number

456.00001

Ordering information

7151 Connecting clamp 1500 A

ø30 mm / 2x 95 mm² / 2x CW 107

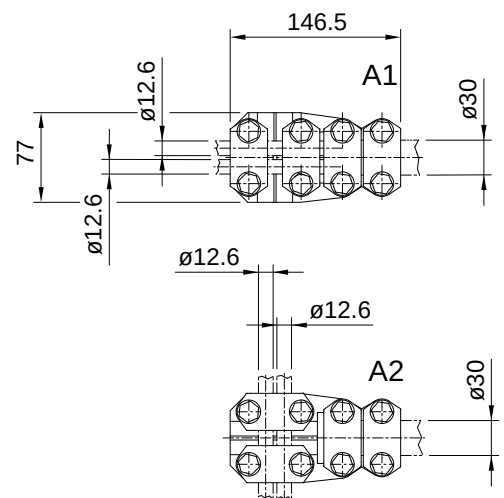

Material

Clamp: CU

Bolt / washer: Fe stainless

Note

Disconnecting switch 15 kV 7111.01 onw

Other clamp range on request.

A1 = Application area 0°

A2 = Application area 90°

Connecting parts


Reducing bush for $\varnothing 20$ 7153

Drawing number

456.00002

Ordering information

7152 Connecting clamp 2000A,
 $\varnothing 30$, 2x 150 mm²

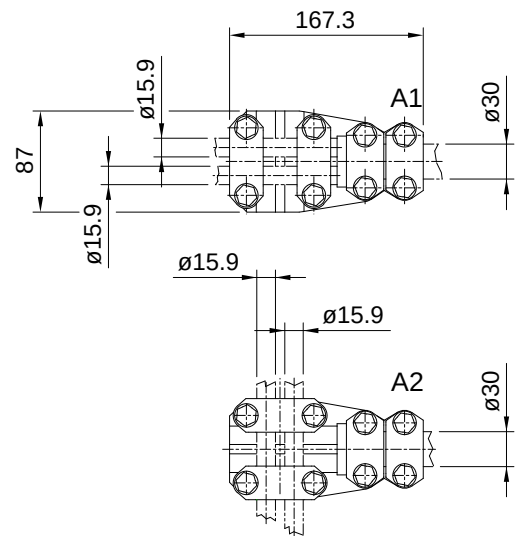

Material

Cu

Associated parts


Connecting clamp 7151 / 7152

Drawing number

585.00070

Ordering information

7153 Douille de réduction $\varnothing 20$ for
Connecting clamp

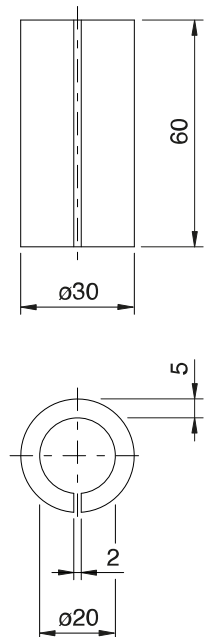

Type Description

0	without fasteners
1	with support 7652 at sectioning point
2	with 3 bolts M16 x 40

Type Key-bolt form

DE	Triangle
HK	Semicircle
HM	Crescent
KR	Cross
RE	Rectangular
ST	Star
TR	Trapezoid
VK	Square
WA	Shield
ZY.1	1 lock
ZY.2	2 lock
ZY.3	3 lock
ZY.4	4 lock

Type Language

D	german
F	french
I	italian

Note

Electric indicator 7213
Base plate 7243
Key system SEA

Included

1 bolt 7231
1 keys 7232
1 switch indicator plate 7244

Stroke length


120 mm

Drawing number

566.00187, .00190, .00209, .00210

Ordering information

with support, crescent bolt, German
*7211.1.Hm.D Manual switch operation
with lock*

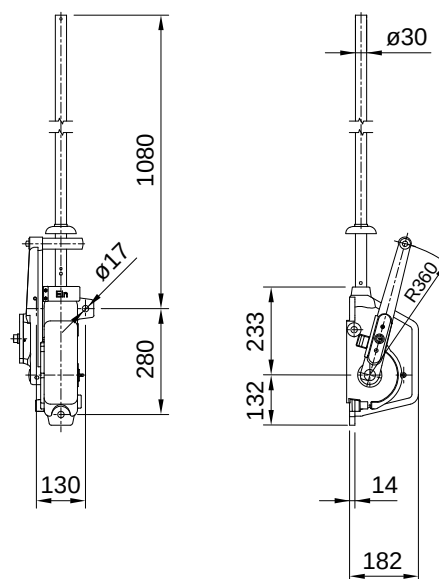

Type Description

1	without enclosure
2	with enclosure

Fasteners

Supplied complete with M4 bolts


Drawing number

566.00119, .00304


Ordering information

with enclosure

7213.2 *Electric indicator for manual switch operation*

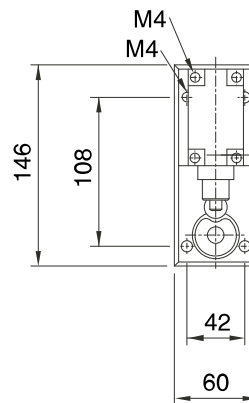

7213.1

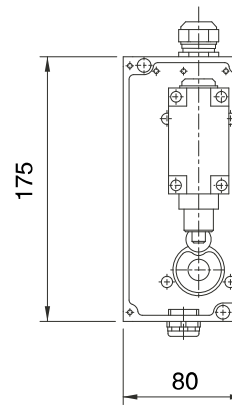

7213.2

Type	Description
0	without rod
1	Rod without joint

Type	Supply voltage
110	110 V DC
230	230 V AC

Note

Supplied complete with handle for manual operation.
Heating included. For conversion from manual
to motor operation on the mast 7651

Fasteners

Supplied complete with 4 bolts M16

Stroke length


120 mm

Drawing number

566.00188, .00189

Ordering information

without rod, 110 V DC
7221.0.110 Motor drive for switch MFL 200

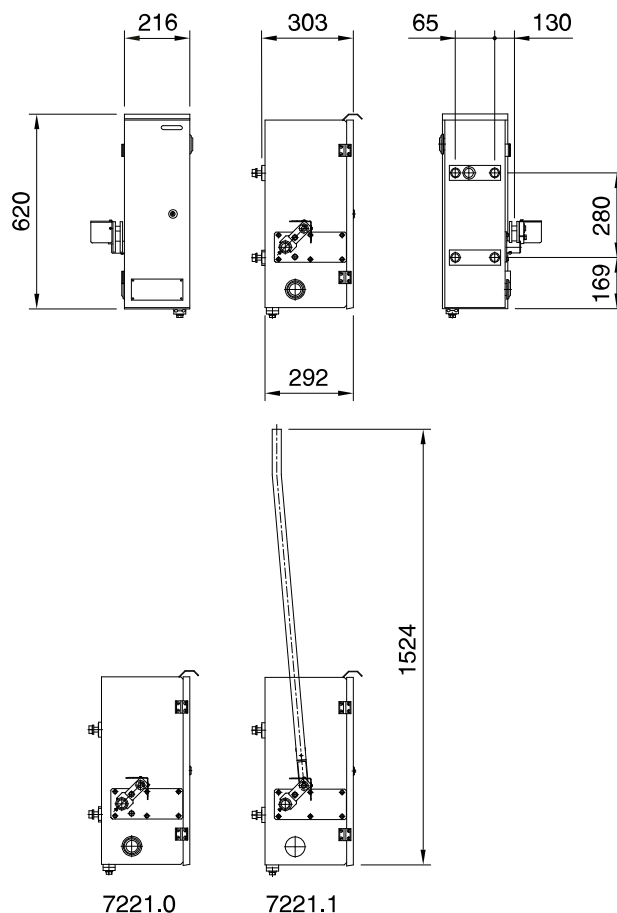**Note**

Version 230 V AC

Stroke length

200 mm

Weight


Wt (kg) = 40.5

Drawing number

566.00245

Ordering information

7223 Electromechanical
switch drive 230 V AC

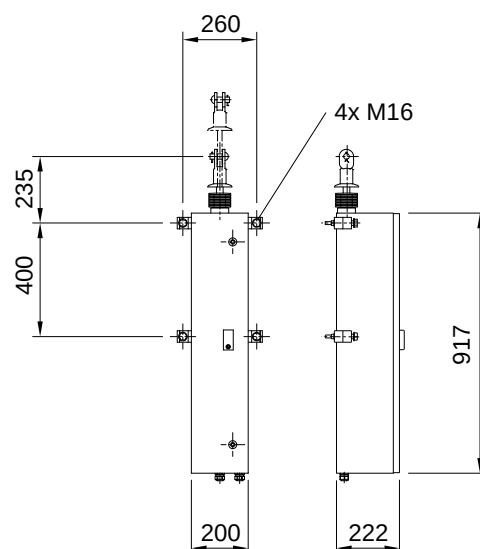

Bolt for manual switch operation with lock

7231

Material

CuSnPb

Type	Description
Re	Rectangular
Tr	Trapezoid
Hk	Semicircle
Hm	Crescent
St	Star
Wa	Shield
Kr	Cross
De	Triangle
Vk	Square



Drawing number

585.00034

Ordering information

Trapezoid form

7231.Tr Bolt for manual switch operation with lock



Key for manual switch operation with lock

7232

Material

CuSnPb

Type	Description
De	Triangle
Hk	Semicircle
Hm	Crescent
Kr	Cross
Re	Rectangular
St	Star
Tr	Trapezoid
Wa	Shield



Drawing number

585.00024-1

Ordering information

Trapezoid form

7232.Tr Key for manual switch operation with lock

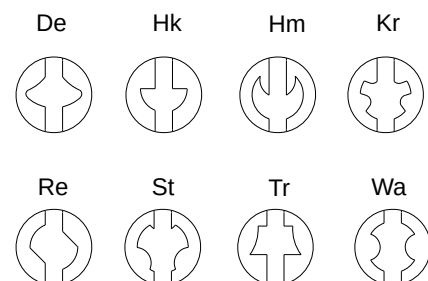

Number plate for switch

7241

Material

Al
Background yellow,
edge and number black

Note


When ordering, please state the text.

Drawing number

581.00032

Ordering information

7241 Number plate for switch



Name plate for switch

7242

Material

Al
Background red, script Al natural

Note


When ordering, please state the text.

Associated parts

Base plate 7243

Ordering information

7242 Name plate for switch

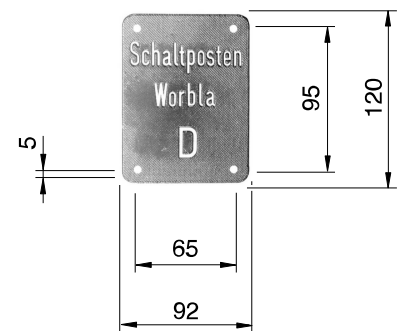

Base plate



7243

Drawing number

566.00013

Ordering information

7243 Base plate



Switch indicator plate for manual operation

7244

Material

Synthetic

On: Background red, script white

Off: Background white, script black

Type	Language	Description
D	German	Ein, Aus
F	French	Enclenché, Déclenché
I	Italian	Inserito, Disinserito

Associated parts

Manual switch operation 7211 onw


Drawing number

581.00044

Ordering information

German

7244.D Switch indicator plate for manual operation

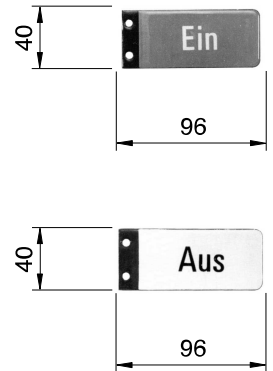

Operating rod, straight with tongue end / rod coupling

7311

Type	L (mm)
40	4000
50	5000
60	6000
70	7000
80	8000
90	9000

Note

Disconnecting switch 7111.01

Disconnecting switch 7112.02

Disconnecting switch 7131.01

from type 70 2-part


Drawing number

561.00572, .01165

Ordering information

Length 7,0 m

7311.70 Operating rod, straight with tongue end / rod coupling

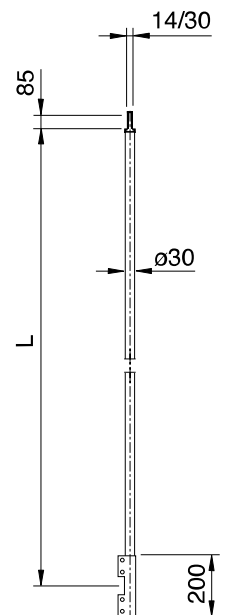

Operating rod, straight with rod coupling / rod coupling

7312

Type	L (mm)
60	6000
70	7000
80	8000

Note

Disconnecting switch 7131

from type 70 2-parts


Drawing number

561.00573, .01167

Ordering information

Length 8,0 m

7312.80 Operating rod, straight with rod coupling / rod coupling

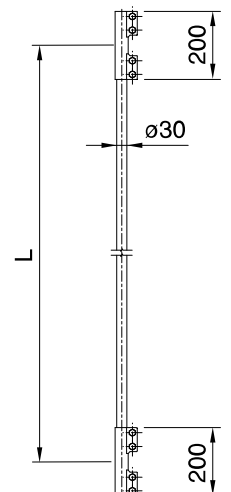

Type	L (mm)
60	6000
70	7000
80	8000

Note

Always 2-piece

Disconnecting switch 7111.01

Disconnecting switch 7112.02


Disconnecting switch 7131.01

Drawing number

561.00574

Ordering information

Length 6,0 m

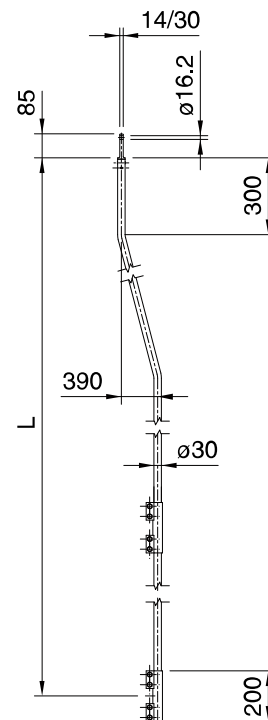7321.60 Operating rod, curved with
tongue end / rod coupling

Type	L (mm)
60	6000
70	7000
80	8000

Note


Always 2-piece

Drawing number

561.00575

Ordering information

Length 8,0 m

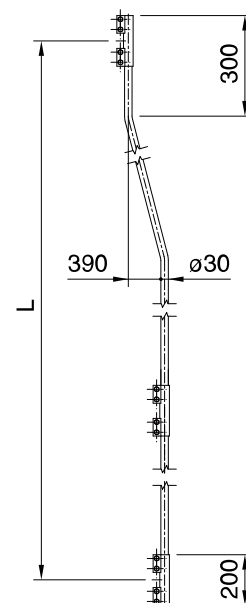
7322.80 Operating rod, curved with rod
coupling / rod coupling

Drawing number

566.00012

Ordering information

7331 Coupling for operating rod

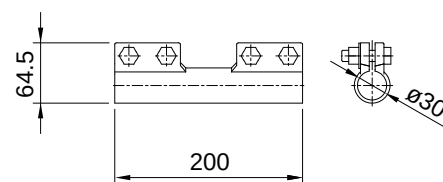

Material

Fe stainless

Note

Disconnecting switch 7111.01

Disconnecting switch 7112.02


Disconnecting switch 7131.01

Drawing number

561.00505-6

Ordering information


7341 Tongue end fitting for rod

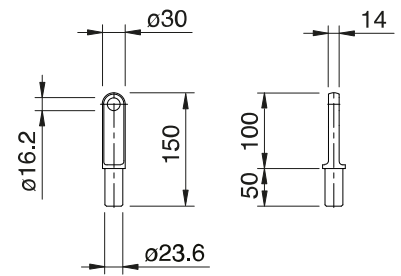 $\varnothing$ 30 mm

Type	Bolts
1	without
2	with

Drawing number
561.00912, .01175

Ordering information
Without bolts
7411.1 Guide for switch operating rod $\varnothing$ 30 mm

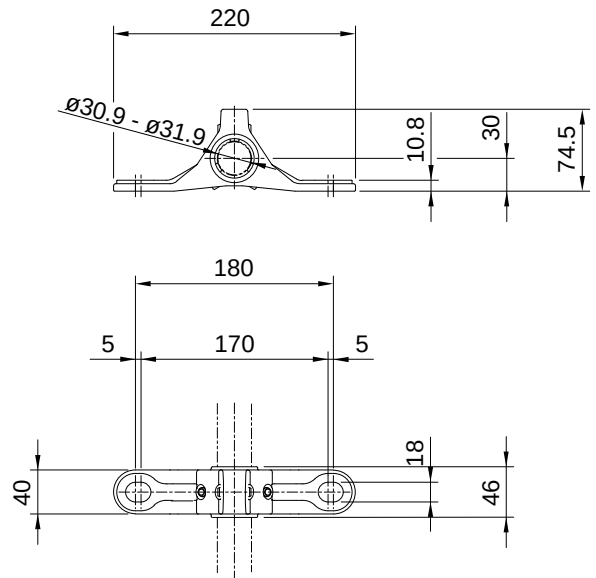

Support for 1 disconnecting switch 15 kV on mast head

7511

Mast range

HEB profiles 160 / 180-240 / 260

Note

Disconnecting switch 7111.01
Disconnecting switch 7112.02

Fasteners

Supplied complete with U-bolts.


Drawing number

561.00387, .00577, .00578

Ordering information

on HEB 220

7511.22 Support for 1 disconnecting switch 15 kV on mast head

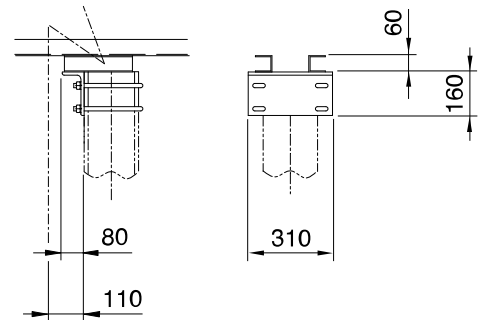

Support for 2 disconnecting switches 15 kV on mast head

7512

Mast range

HEB profiles 160 / 180-240 / 260

Note

Disconnecting switch 7111.01
Disconnecting switch 7112.02

Fasteners

Supplied complete with U-bolts.


Drawing number

561.01272, .01274, .01276

Ordering information

on HEB 200

7512.20 Support for 2 disconnecting switches 15 kV on mast head

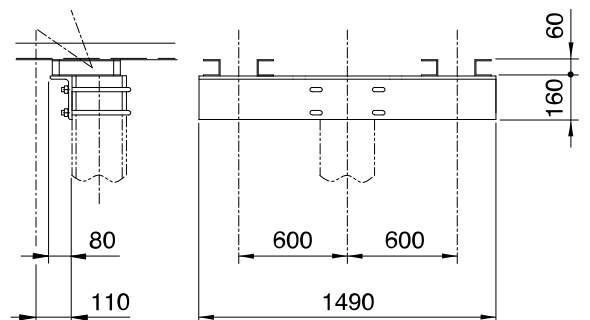

Support for 3 disconnecting switches 15 kV on mast head

7513

Mast range

HEB profiles 160 / 180-240 / 260

Note

Disconnecting switch 7111.01
Disconnecting switch 7112.02

Fasteners

Supplied complete with U-bolts.


Drawing number

561.00394, .00579, .00580

Ordering information

on HEB 240

7513.24 Support for 3 disconnecting switches 15 kV on mast head

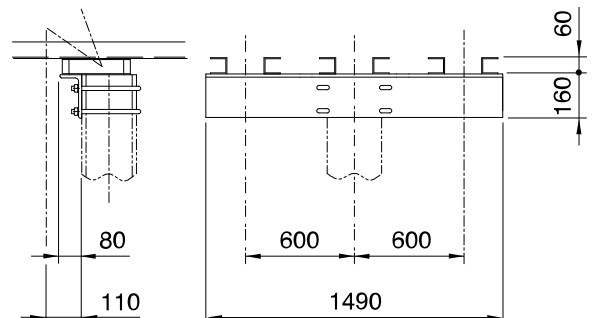

Mast range

HEB profiles 160-260

Note

Disconnecting switch 7111.01

Disconnecting switch 7112.02

Fasteners


Supplied complete with U-bolts.

Drawing number

561.02665

Ordering information

on HEB 180

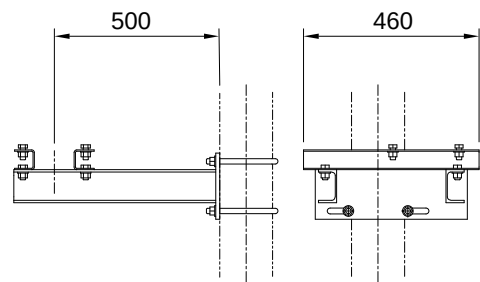*7514.18 Support for 1 disconnecting
switch 15 kV mounted on the side of
mast*

Support for 1 disconnecting switch 3,6 kV on mast head

7541

Mast range

HEB profiles 160 / 180-240 / 260

Note

Disconnecting switch 7131.01

Fasteners

Supplied complete with U-bolts.


Drawing number

561.00454, .00581, .00582

Ordering information

on HEB 180

7541.18 Support for 1 disconnecting switch 3,6 kV on mast head



Support for 2 disconnecting switches 3,6 kV on mast head

7542

Mast range

HEB profiles 160 / 180-240 / 260

Note

Disconnecting switch 7131.01

Fasteners

Supplied complete with U-bolts.


Drawing number

561.00917, .00927, .00930

Ordering information

on HEB 200

7542.20 Support for 2 disconnecting switches 3,6 kV on mast head

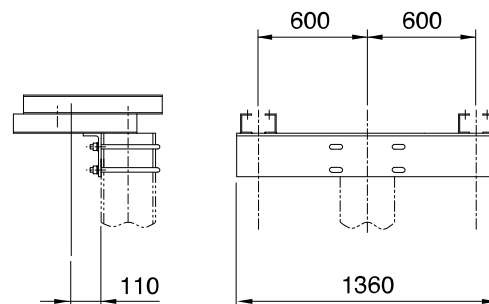

Support for 3 disconnecting switches 3,6 kV on mast head

7543

Mast range

HEB profiles 160 / 180-240 / 260

Note

Disconnecting switch 7131.01

Fasteners

Supplied complete with U-bolts.


Drawing number

561.00918, .00928, .00933

Ordering information

on HEB 200

7543.22 Support for 3 disconnecting switches 3,6 kV on mast head

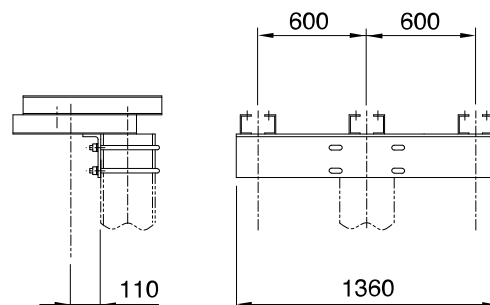

Support for 1 disconnecting switch 3,6 kV mounted on the side of mast

7544

Mast range

HEB profiles 160-260

Note

Disconnecting switch 7131.01

Fasteners

Supplied complete with U-bolts.


Drawing number

561.01405

Ordering information

on HEB 200

*7544.20 Support for 1 disconnecting
switches 3,6 kV mounted on the side of
mast*

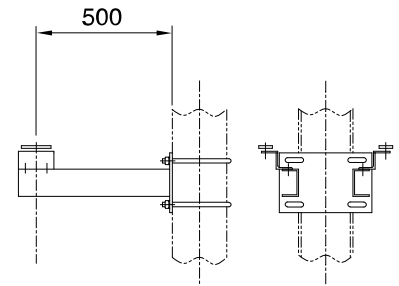

Fastening plates for 1 disconnecting switch 3,6 kV at sectioning point

7545

Note

Disconnecting switch 7131.01

Fasteners


Supplied complete with U-bolts.

Drawing number

561.00391

Ordering information

*7545 Fastening plates for 1
disconnecting switch 3,6 kV at
sectioning point*



Gantry for single manually operated on mast

7611

Mast range

HEB profiles 160 / 180-240 / 260

Note

When ordering, state number of tube guides (2 or 3).

Disconnecting switch 7111.01 onw

Support plate for motor

drive 7651

Fasteners

Supplied complete with U-bolts.

Drawing number

561.00599


Ordering information

with 2 rod guides, on HEB 220

7611.2.22 Gantry for single

manually operated

on mast

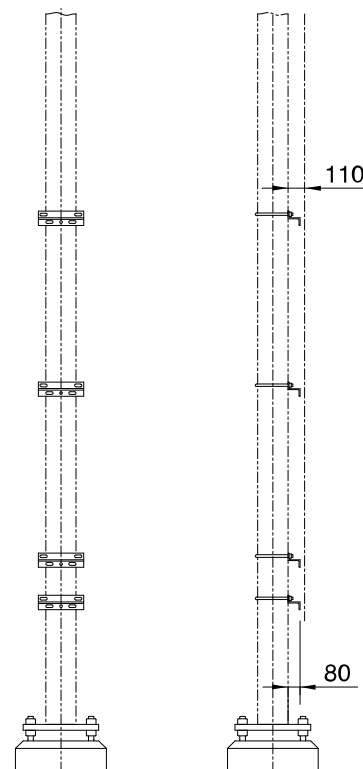

Gantry for 2-3 manually operated on mast

7612

Mast range

HEB profiles 160 / 180-240 / 260

Note

When ordering, state number of tube guides (2 or 3).

Disconnecting switch 7111.01 onw

Support plate for motor

drive 7651

Fasteners

Supplied complete with U-bolts.

Drawing number


561.00600, .00600-20, .00600-21, .00600-23, .00600-26

Ordering information

with 3 rod guides, on HEB 240

7612.3.24 Gantry for 2-3 manually operated

on mast

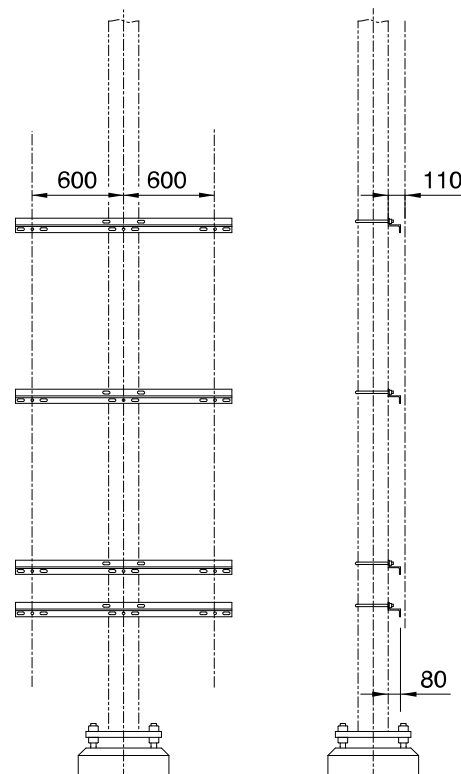

Mast range

HEB profiles 160 / 180-240 / 260

Note

When ordering, state number of tube guides (2 or 3).
Disconnecting switch 7111.01 onw

Fasteners

Supplied complete with U-bolts.


Drawing number

561.00592

Ordering information

with 2 rod guides, on HEB 220

7621.2.22 Gantry for single
motor drive
on mast

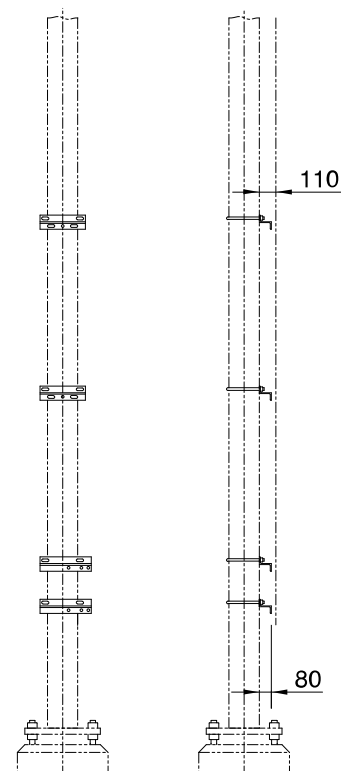**Mast range**

HEB profiles 160 / 180-240 / 260

Note

When ordering, state number of tube guides (2 or 3).
Disconnecting switch 7111.01 onw

Fasteners

Supplied complete with U-bolts.


Drawing number

561.00593, .00593-1 - .00593-8

Ordering information

with 3 rod guides, on HEB 240

7622.3.24 Gantry for 2-3
motor drive on mast

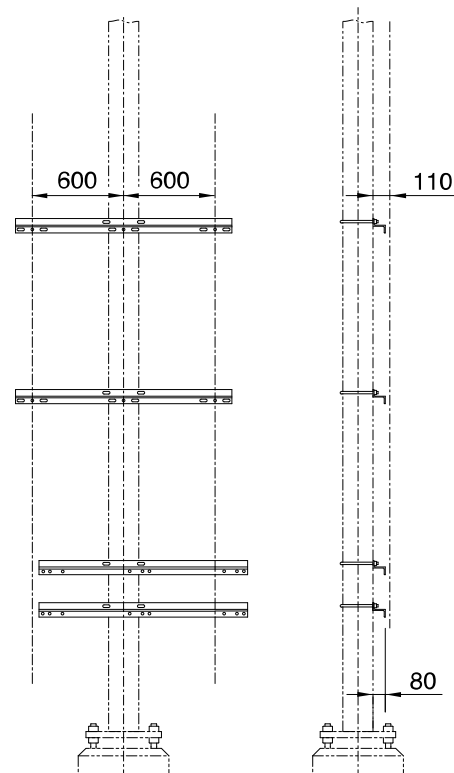

Mast range

HEB profiles 200-260

Note

When ordering, state number of rod guides (2 or 3), and also the mast size and mast position (normal = N, turned = V).

In the case of motor drive, a metal cover is available on request for cable protection.

For 2 field sectioning point:

4 long shank bolts 3251
order separately

Fasteners

Supplied complete with U-bolts.

Drawing number

561.00595


Ordering information

2 rod guides

1 mast HEB 200 normal

1 mast HEB 240 turned

7631.2.20N.24V Gantry for 4-switch
sectioning point 15 kV

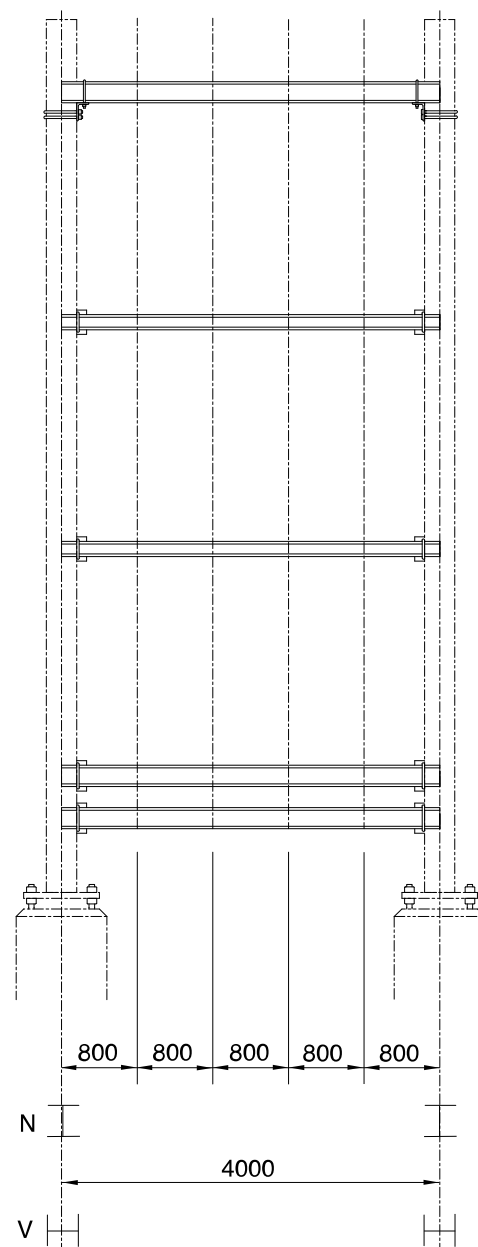

Mast range

HEB profiles 200-260

Note

When ordering, state number of rod guides (2 or 3), and also the mast size and mast position (normal = N, turned = V).

In the case of motor drive, a metal cover is available on request for cable protection.

For 2 field sectioning point:

4 long shank bolts 3251
order separately

Fasteners

Supplied complete with U-bolts.

Drawing number

561.00595


Ordering information

2 rod guides

1 mast HEB 220 normal

1 mast HEB 240 normal

7632.2.22N.24N Gantry for 5-switch
sectioning point 15 kV

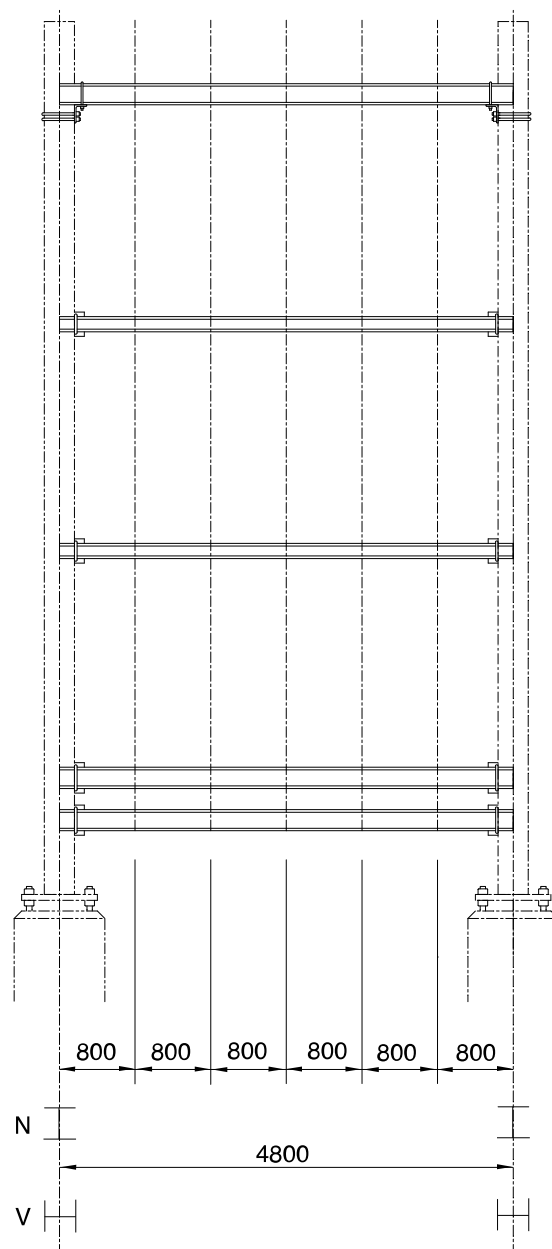

Mast range

HEB profiles 200-260

Note

When ordering, state number of rod guides (2 or 3), and also the mast size and mast position (normal = N, turned = V).

In the case of motor drive, a metal cover is available on request for cable protection.

For 2 field sectioning point:

4 long shank bolts 3251

order separately

Fasteners

Supplied complete with U-bolts.

Drawing number

561.00595


Ordering information

3 rod guides

1 mast HEB 240 normal

1 mast HEB 240 turned

7633.3.24N.24V Gantry for 6-switch
sectioning point 15 kV

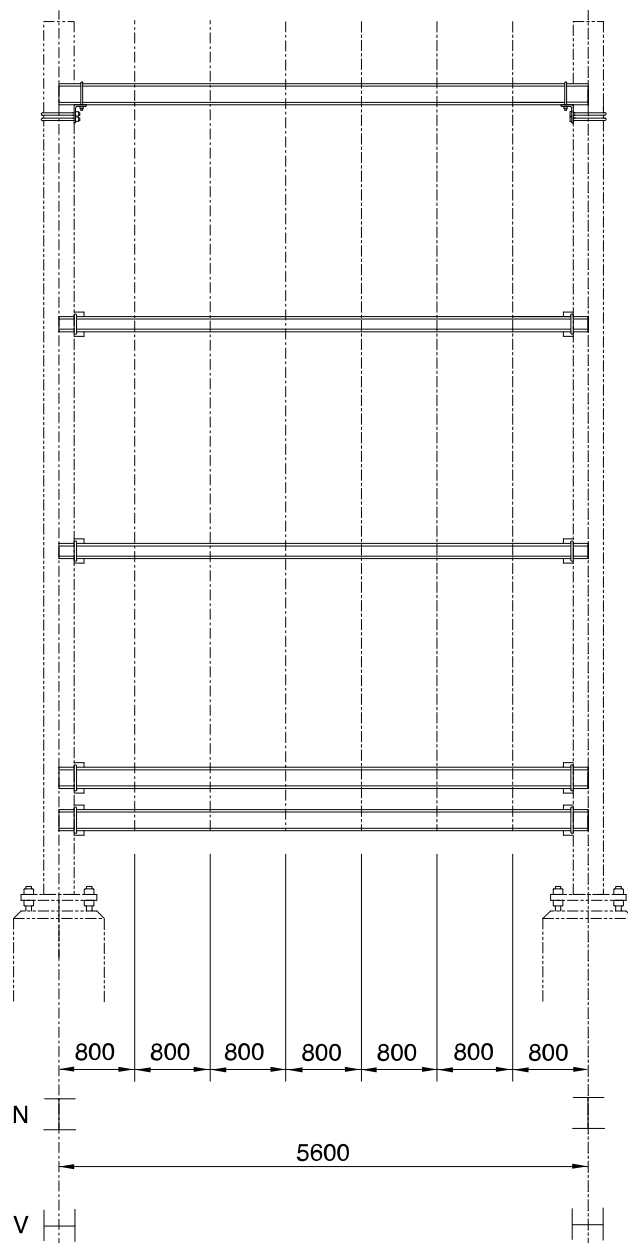

Mast range

HEB profiles 200-260

Note

When ordering, state number of rod guides (2 or 3), and also the mast size and mast position (normal = N, turned = V).

In the case of motor drive, a metal cover is available on request for cable protection.

For 2 field sectioning point:

4 long shank bolts 3251
order separately

Fasteners

Supplied complete with U-bolts.

Drawing number

561.00596


Ordering information

2 rod guides

1 mast HEB 200 normal

1 mast HEB 220 turned

7641.2.20N.22V Gantry for 4-switch
sectioning point 1,5 - 3,6 kV

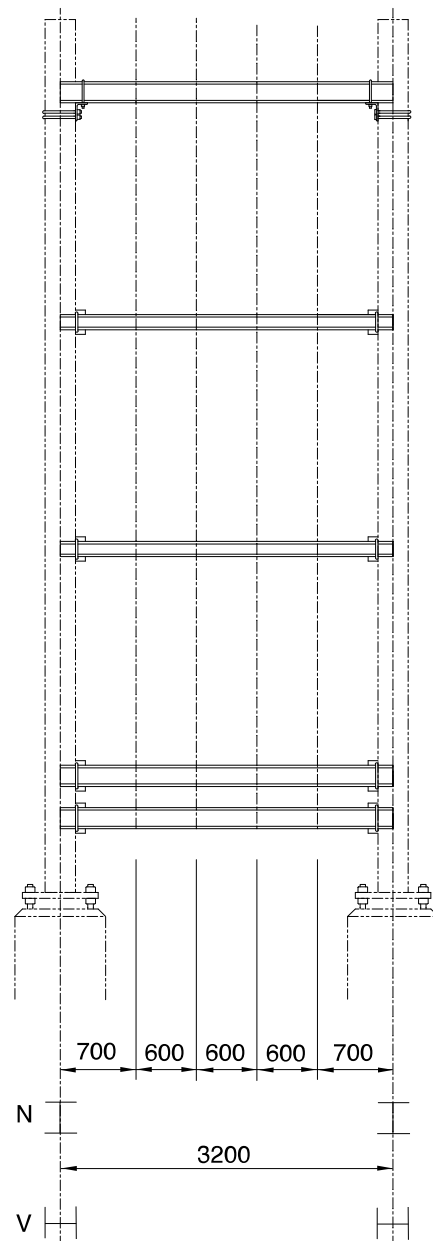

Mast range

HEB profiles 200-260

Note

When ordering, state number of rod guides (2 or 3), and also the mast size and mast position (normal = N, turned = V).

In the case of motor drive, a metal cover is available on request for cable protection.

For 2 field sectioning point:

4 long shank bolts 3251
order separately

Fasteners

Supplied complete with U-bolts.

Drawing number

561.00596


Ordering information

2 rod guides

1 mast HEB 220 normal

1 mast HEB 220 normal

7642.2.22N.22N Gantry for 5-switch
sectioning point 1,5 - 3,6 kV

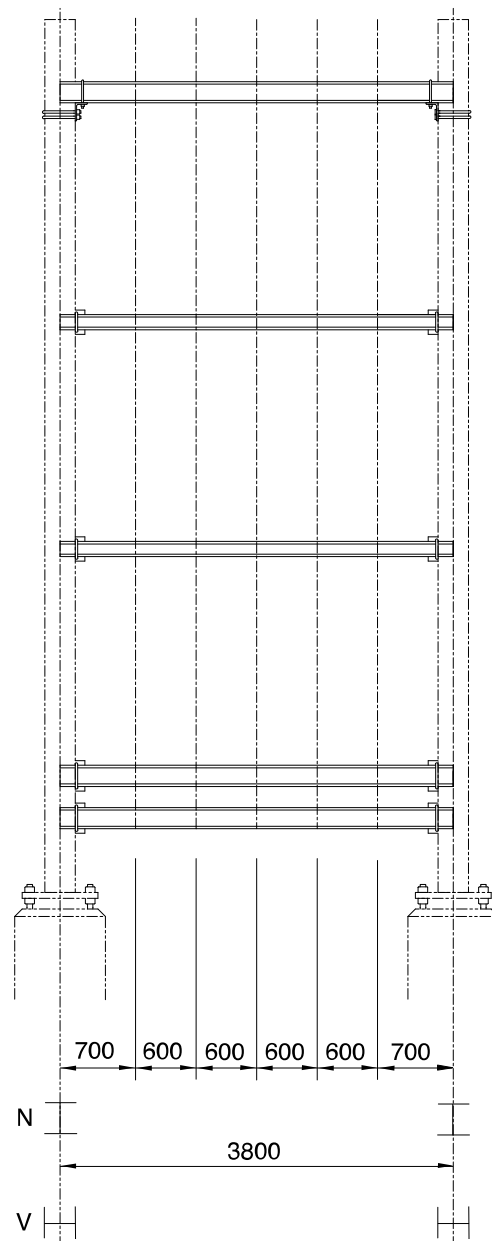

Mast range

HEB profiles 200-260

Note

When ordering, state number of rod guides (2 or 3), and also the mast size and mast position (normal = N, turned = V).

In the case of motor drive, a metal cover is available on request for cable protection.

For 2 field sectioning point:

4 long shank bolts 3251
order separately

Fasteners

Supplied complete with U-bolts.

Drawing number

561.00596


Ordering information

3 rod guides

1 mast HEB 240 normal

1 mast HEB 220 turned

7643.3.24N.22V Gantry for 6-switch
sectioning point 1,5 - 3,6 kV

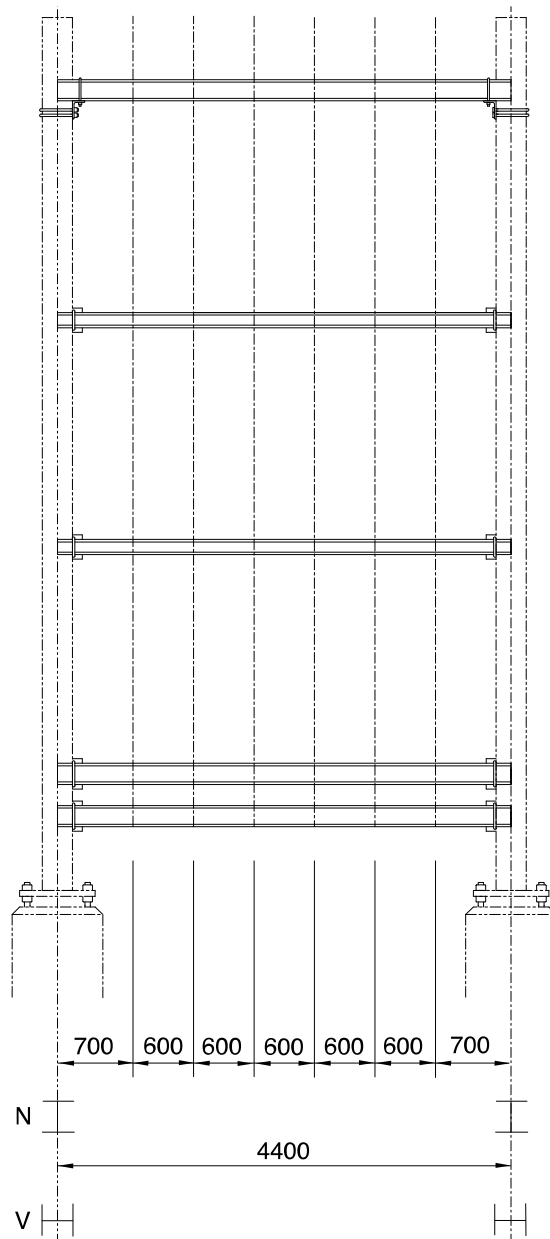

Mast range

HEB profiles 200-260

Note

When ordering, state number of rod guides (2 or 3), and also the mast size and mast position (normal = N, turned = V).

In the case of motor drive, a metal cover is available on request for cable protection.

For 2 field sectioning point:

4 long shank bolts 3251
order separately

Fasteners

Supplied complete with U-bolts.

Drawing number

561.00596


Ordering information

2 rod guides

1 mast HEB 240 normal

1 mast HEB 260 turned

7644.2.24N.26V Gantry for 7-switch
sectioning point 1,5 - 3,6 kV

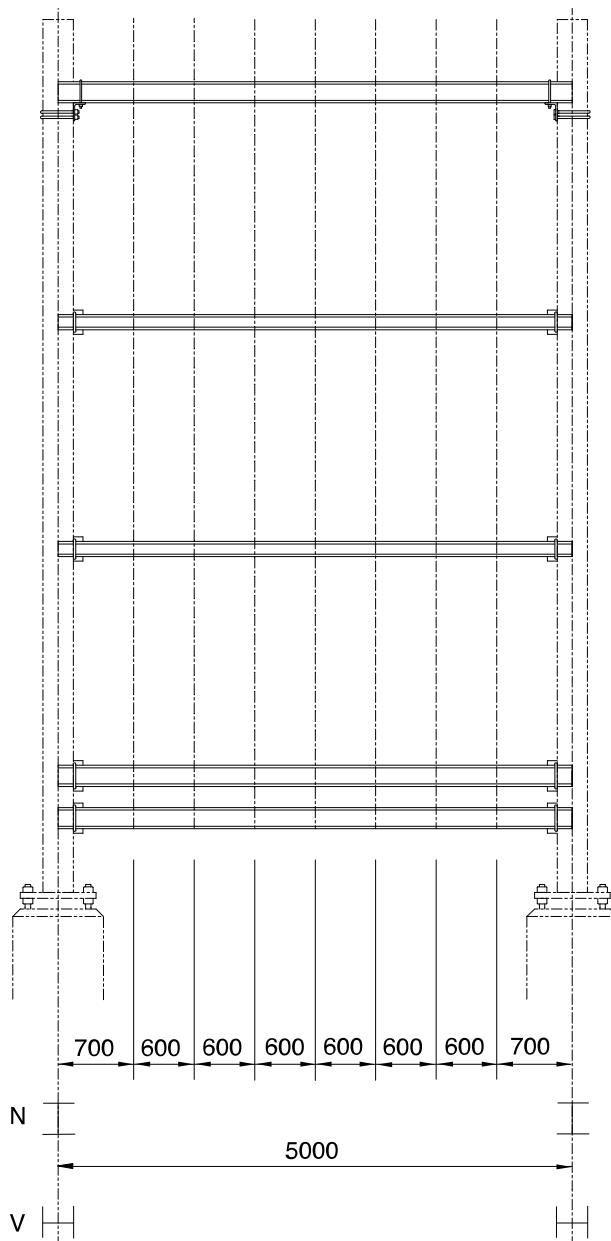

Mast range

HEB profiles 200-260

Note

When ordering, state number of rod guides (2 or 3), and also the mast size and mast position (normal = N, turned = V).

In the case of motor drive, a metal cover is available on request for cable protection.

For 2 field sectioning point:

4 long shank bolts 3251
order separately

Fasteners

Supplied complete with U-bolts.

Drawing number

561.00596


Ordering information

3 rod guides

1 mast HEB 240 normal

1 mast HEB 240 normal

7645.3.24N.24N Gantry for 8-switch
sectioning point 1,5 - 3,6 kV

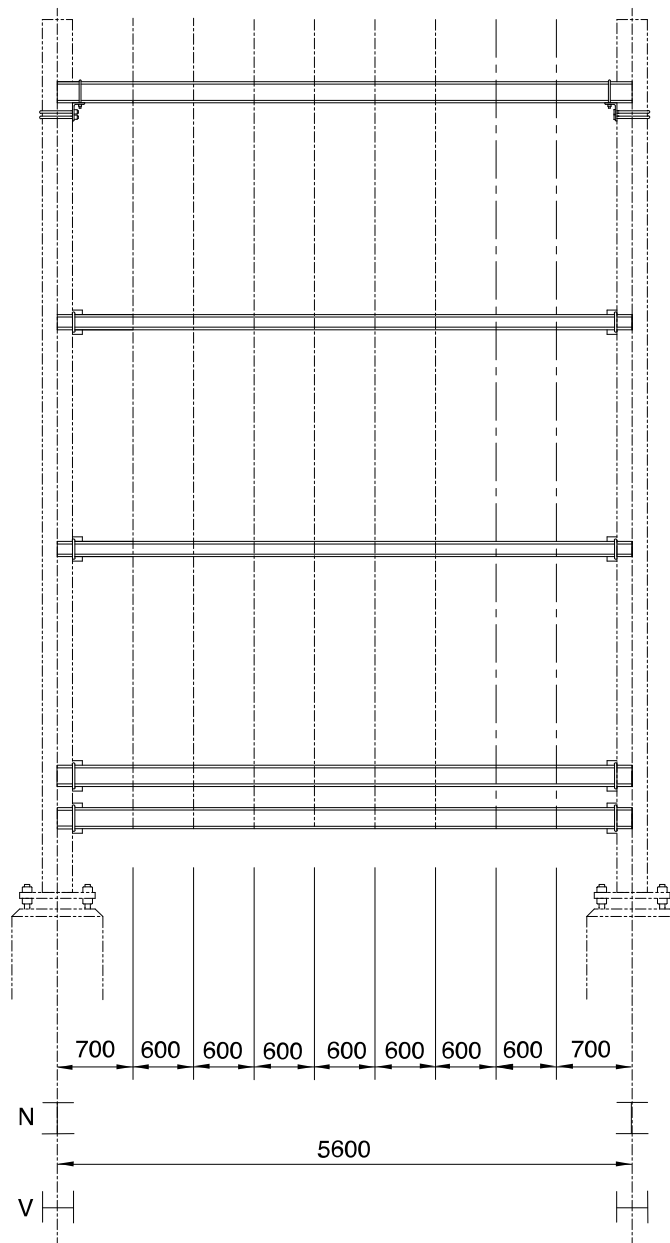

Note

For conversion from manual to motor operation.

Fasteners


Supplied complete with bolts.

Drawing number

561.00202

Ordering information

7651 Support plate for motor drive

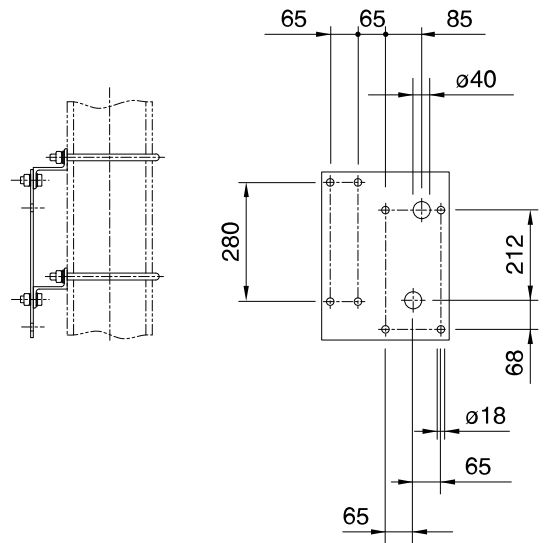**Fasteners**


Supplied complete with bolts.

Drawing number

561.00221

Ordering information

7652 Support for fastening manual drive

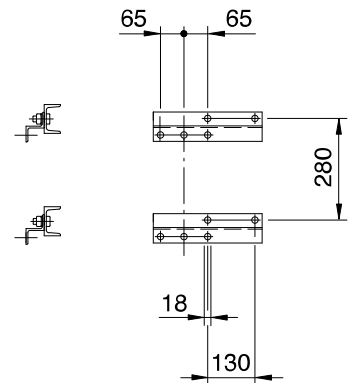

Material

Cu tin-plated

Type	L (mm)
3	300
4	400
5	500

Note


Disconnecting switch 7131

Drawing number

567.00078

Ordering information

Length 400 mm

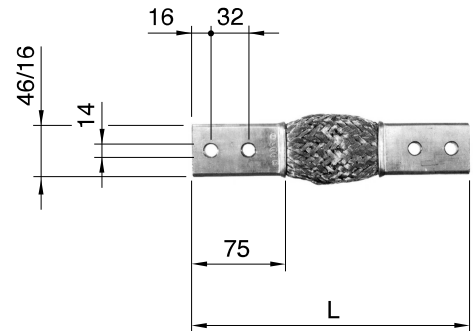7661.4 Flexible connector 300 mm²**Note**


For busbar support with insulator 5154

Drawing number

458.00029

Ordering information

7662 Busbar support clamp

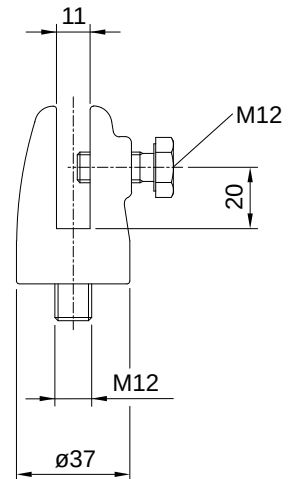

Note

Lift 120 mm

1 = Switch lock closed

2 = Switch lock open

Fasteners



Supplied complete with U-bolts.

Drawing number

561.00313

Ordering information

7671 Switch lock assembly 15 kV

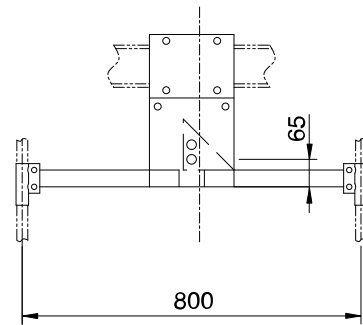**Note**

Lift 100 or 120 mm

1 = Switch lock closed



2 = Switch lock open

Fasteners

Supplied complete with U-bolts.

Drawing number

561.00313

Ordering information7672 Switch lock assembly
1,5 kV - 3,6 kV

Mast range

HEB profiles 160 / 180-240 / 260

Fasteners

Supplied complete with U-bolts.


Drawing number

473.00008, .00008-1, .00008-2

Ordering information

on HEB 200

7681.20 Bracket for 1 overvoltage arrester

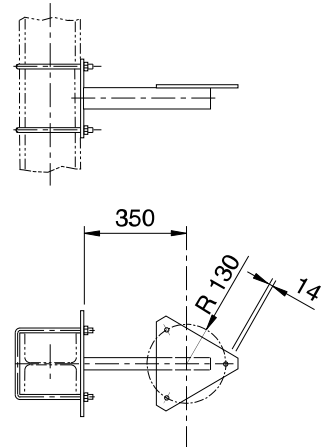**Material**

Synthetic

Type	Continuous/ measuring voltage $U_c=U_r$ (V)	Residual voltage U_{res} (kV)	Wt (kg)
10	1000	2.38	5.7
15	1500	3.57	5.8
20	2000	4.76	6.0
30	3000	7.14	6.5

Associated parts

Cable lug 4511 onw

Fasteners

Supplied complete with bolts M12


Drawing number

473.00053

Ordering information

Rated voltage 1,5 kV

7682.15 Overvoltage arrester, dc

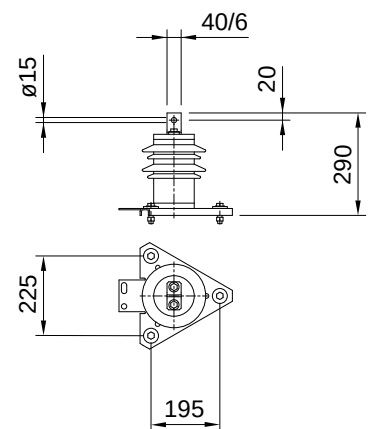**Associated parts**


Cable lug 4511 onw

Mast bracket
for steady arm 5411**Fasteners**Supplied complete with
M16 x 50 mm bolts.**Weight**

Wt (kg) = 5,0

Ordering information

7683 Lightning protection 1500 V



Material
Synthetic

Type	Track system voltage (kV)	Rated Voltage (V)	Rated-voltage U_r (kV)	Residual voltage U_{res} (kV)	Wt (kg)
11	11	14	17.5	44.3	11.6
15	15	18	22.5	56.9	12.1


Associated parts
Cable lug 4511 onw

Fasteners
Supplied complete with bolts M12

Frequency
16.7 Hz

Drawing number
473.00145, .00145-1

Ordering information
Track system voltage 15 kV
7684.15 Overvoltage arrester, ac

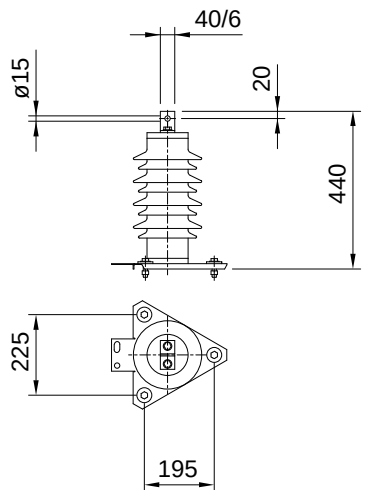

Note

Unipolar insulated cast-resin voltage transformer.
Outdoor type.
Electrotechnical verification of the
application conditions is required
in any case.

Technical data

Voltage series = 36

Primary voltage = 15 kV

Secondary voltage = 230 V

Frequency = 16.7 Hz

Thermal limit power = 30 VA

Weight = 51 kg

Associated parts

Brackets must be ordered separately
according to local conditions


Drawing number

564.00228

Ordering information

for 15 kV

7691.01 Voltage transformer GEF, 15 kV

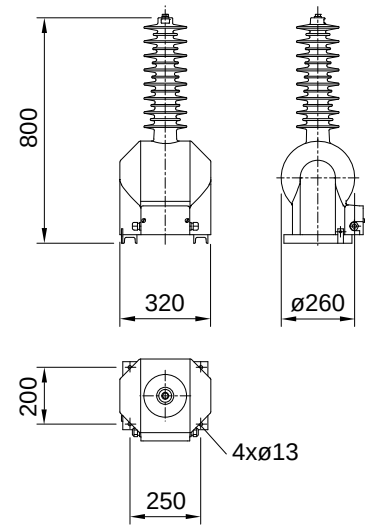

Note

Unipolar insulated cast-resin voltage transformer.
Outdoor type.
Electrotechnical verification of the
application conditions is required
in any case.

Technical data

Voltage series = 36
Primary voltage = 15 kV
Secondary voltage = 230 V
Frequency = 16.7 / 50 / 60 Hz
Thermal limit power = 1000 VA
Weight = 115 kg

Associated parts



Brackets must be ordered separately
according to local conditions

Drawing number

923.00024

Ordering information

7691.02 Voltage transformer EOF, 15 kV

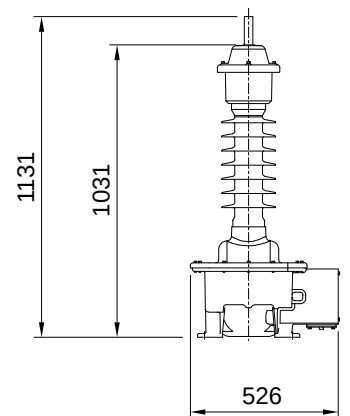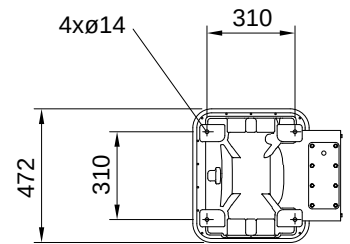

Note

Unipolar insulated cast-resin voltage transformer.
Outdoor type.
Electrotechnical verification of the
application conditions is required
in any case.

Technical data

Voltage series = 36
Primary voltage = 25 kV
Secondary voltage = 230 V
Frequency = 50 / 60 Hz
Thermal limit power = 200 VA
Weight = 170 kg

Associated parts



Brackets must be ordered separately
according to local conditions

Drawing number

584.00080

Ordering information

7692.01 Voltage transformer VEF, 25 kV

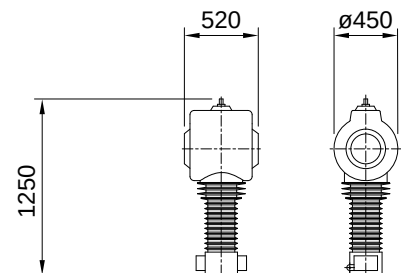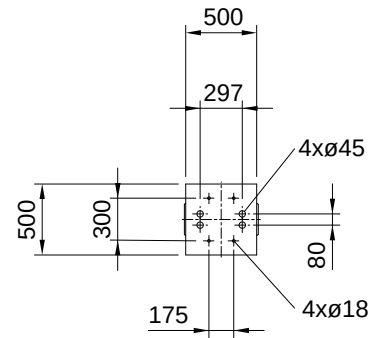

Note

Unipolar insulated cast-resin voltage transformer.
Outdoor type.
Electrotechnical verification of the
application conditions is required
in any case.

Technical data

Voltage series = 36
Primary voltage = 25 kV
Secondary voltage = 230 V
Frequency = 16.7 / 50 / 60 Hz
Thermal limit power = 1000 VA
Weight = 125 kg

Associated parts

Brackets must be ordered separately
according to local conditions

Drawing number

923.00024

Ordering information

7692.02 Voltage transformer EOF, 25 kV

