

Matière

Synthétique

Type	kV	L (mm)	P (kg)	Assiettes	F _{min} (kN)	Armat- ures	dist. de chemin (mm)
03	3	260	7.4	3	35.0	FVZ	370
25.1	25	500	9.6	9	15.0	FVZ	1092
25.2	25	615	11.1	13	13.5	FVZ	1550
25.3	25	500	9.6	9	15.0	A4	1092
25.4	25	615	11.1	13	13.5	A4	1550

RemarqueM_{min} au pied (Nm) = 7500**Force de traction**F_{min} (kN) = 100**N° dessin**


424.00054, .00151, .00176, .00197, .00198

Exemple de commande


25 kV

5158.25.1 Isolateur composite avec raccord à brides

5158.03

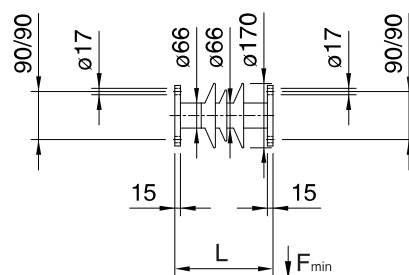

5158.25.1 / 5158.25.3

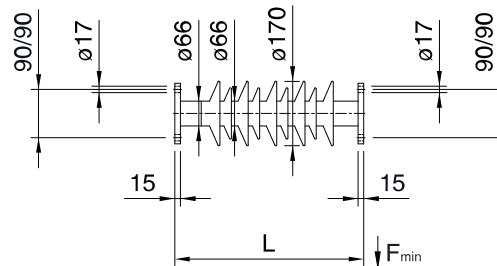

5158.25.2 / 5158.25.4

