



Cantilever on tangent track with stitch-wire suspension

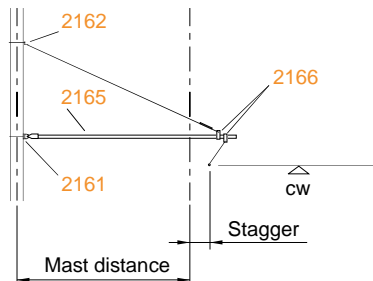

Cantilever on inside of curve with stitch-wire suspension

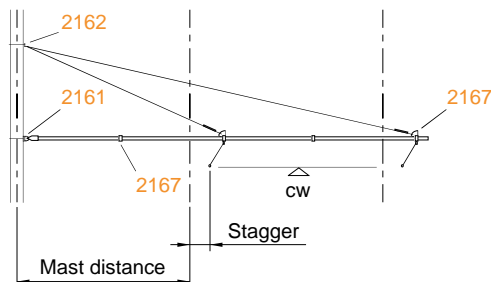

Basics for cantilever geometrie

- | | | | | | |
|-------------|---------------------------------------|--|---------------------------------|---------------------------------|---------------------------------|
| Voltage: | <input type="checkbox"/> 1.5 kV | <input type="checkbox"/> 11 kV | <input type="checkbox"/> 15 kV | <input type="checkbox"/> 20 kV | <input type="checkbox"/> _____ |
| Stagger: | <input type="checkbox"/> ±10 cm | <input type="checkbox"/> ±15 cm | <input type="checkbox"/> ±20 cm | <input type="checkbox"/> ±25 cm | <input type="checkbox"/> ±_____ |
| Version: | <input type="checkbox"/> Fe stainless | <input type="checkbox"/> Fe hot dip galvanised | | | |
| Insulation: | <input type="checkbox"/> unprepared | <input type="checkbox"/> prepared | | | |

- | | | |
|----------------------|-----------------------|-------------------------|
| Systemheight: | _____ m | (from 1.00 m to 2.20 m) |
| V max.: | _____ km/h | |
| Contact wire height: | _____ m | (over SOK) |
| Contact wire (Fa): | _____ mm ² | Zug Fa: _____ kN |
| Support cable (Ts): | _____ mm ² | Zug Ts: _____ kN |

- | | | |
|-----------------|----------|--|
| Radius min: | _____ m | |
| Superelevation: | _____ mm | (Narrow gauge max. 105 mm / Standard gauge 150 mm) |
| Pole spacing: | _____ m | (from 2.50 m to 3.50 m) |