

**Material**

Al

**Note**

L = 11,9 m

Other lengths available on request.

Cross-section of the rigid bar:

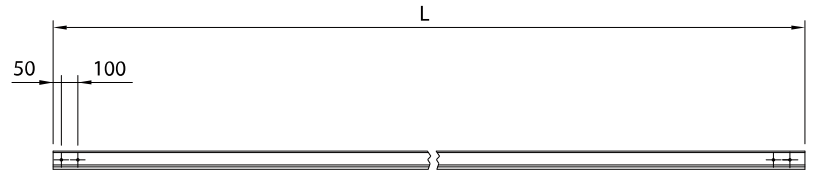

1343 mm<sup>2</sup> copper equivalent.

For radii less than 100 m the rigid bar must be mechanically pre-formed.

Greasing sleeve 4632

Protective grease 4633

Protected by patent

**Associated parts**

Conductor rail support 2613 onw

Feeder clamp 3441

Section insulator 4261 onw

Interlocking joint (pair) 4612 onw

Conductor rail expansion joint 4622

Clip for earthing rod 6222 onw

Protecting plastic 4614

**Weight**

Wt (kg/m) = 6,17

**Drawing number**

963.01535, .01536

**Ordering information**

4611 Overhead conductor rail CR4