

**Material**

Al, Fe stainless

Type	Electric load (A)	Weight (kg)
1	< 2000 A	57
2	> 2000 A - 3100 A	58

**Note**

Expansion movement +/- 500 mm

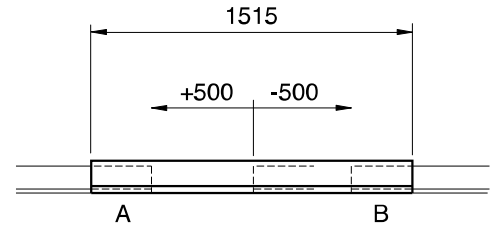
A = fix part

B = movable part

Possible contact wire

normal strength Copper 4622.x.1.107

Valthermo 4622.x.6.107 / .6.120 / .6.150

**Drawing number**

962.00892, .00919

**Ordering information****Example 1**Conductor rail expansion joint CR4 electric load < 2000 A  
with contact wire 107 mm<sup>2</sup>

4622.1.1.107 Conductor rail expansion joint CR4

**Example 2**Conductor rail expansion joint CR4 electric load < 2000 A  
without contact wire

4622.1 Conductor rail expansion joint CR4