Support for termination beam with one deviation and two weight guides

2273

Mast range
HEB profiles 180-260

Note
Length L min. 3,00 m
Length L max. 5,00 m
Available in steps of de 0,5 m.
G = Track axis
F = Pulling direction
L = left
R = right
Counterweight rod 4322
Counterweight 4323 onw


Termination beam
Profil UNP 120-240

Fasteners
Supplied complete with U-bolts.

Bestehend aus
Support for termination beam, complete 523.00112
Lower cross arm 523.00194
Tube for weight guide 4374
Spacer 4375

Drawing number
523.00184

Ordering information
for UNP 200, on HEB 260
L = 4,50 m, right
2273.20.26.45.R Support for termination beam with one deviation and two weight guides

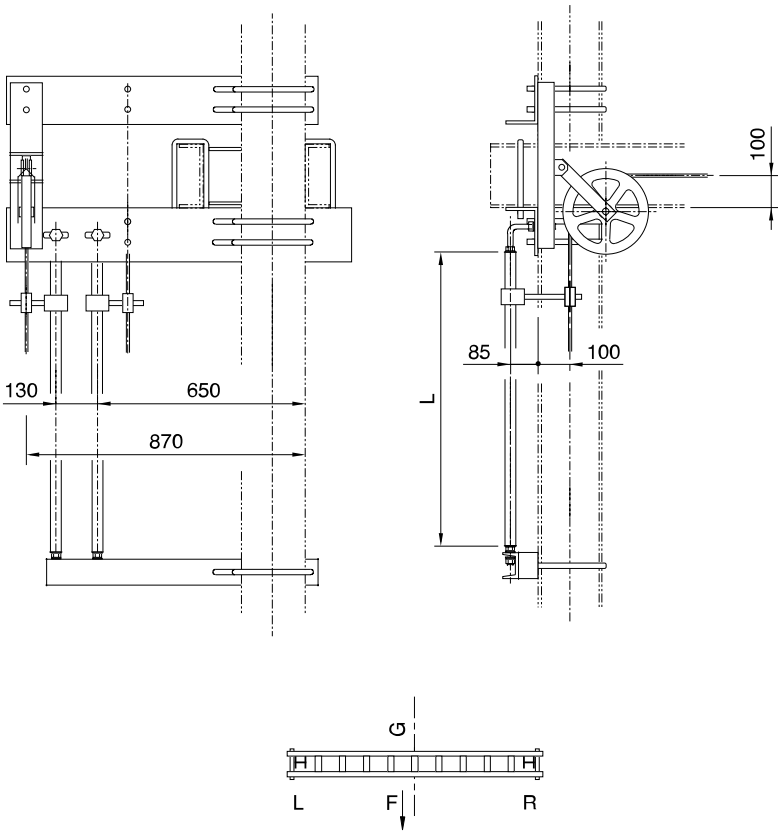

Furrer+Frey
Overhead contact lines