




5158.03

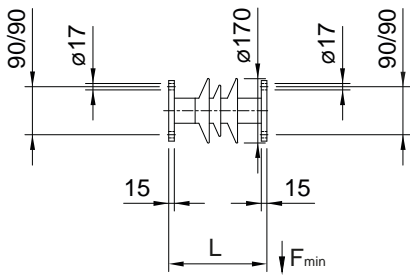


5158.25.1 / 5158.25.3

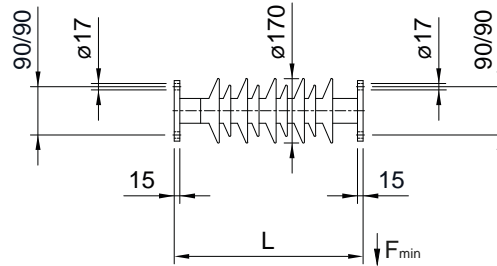

5158.25.2 / 5158.25.4

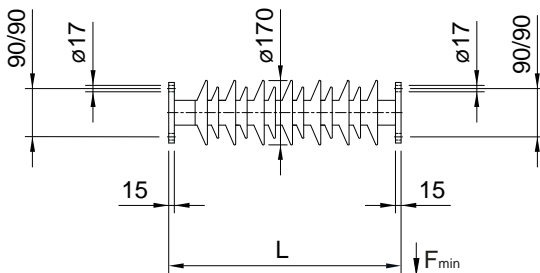

5158.25.5

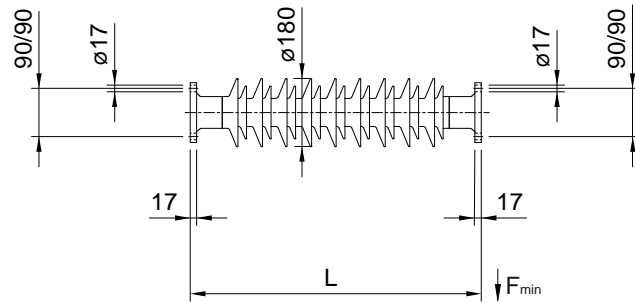

Material

Synthetic

| Type | kV | L (mm) | G (kg) | Sheets | F_{min} (kN) | Fittings | creep dist. (mm) | arcing distance (mm) |
|------|----|-----------|-----------|--------|-------------------|----------|------------------------|----------------------------|
| 03 | 3 | 260 | 7.4 | 3 | 35.0 | FVZ | 370 | 185 |
| 25.1 | 25 | 500 | 9.6 | 9 | 15.0 | FVZ | 1092 | 419 |
| 25.2 | 25 | 615 | 11.1 | 13 | 13.5 | FVZ | 1550 | 560 |
| 25.3 | 25 | 500 | 9.6 | 9 | 15.0 | A4 | 1092 | 419 |
| 25.4 | 25 | 615 | 11.1 | 13 | 13.5 | A4 | 1550 | 560 |
| 25.5 | 25 | 770 | 15.8 | 18 | 14.3 | FVZ | 2000 | 645 |

Tensile force

$F_{T min}$ (kN) = 100

Drawing number

424.00054, .00151, .00176, .00197, .00198, .00224

Ordering information

25 kV

5158.25.1 Composite insulator with flanged joints