Material
Insulation Synthetic material
Fittings Fe stainless

Type	Used for
1	with delta cable clamp for cable ø 6 mm
2.1	with pulley for steel cable ø 6 mm
2.2	with pulley for Kevlar rope ø 10 mm
3	with hinged rope clamp
4	with contact wire swivel clip, groove type
5	for steady arm tube
6	with eyebolt for hinged suspension, suspension, delta cable
7	with feeder uspension clamp
8	with hold-down device, spring-loaded and movable

Note
on cross span ø 4,5 - 9 mm / 35 - 50 mm^2


Associated parts
Hinged rope clamp 5351
Contact wire swivel clip 5557
Steady arm tube
with eye end fitting 5523
Delta cable 5565 onw
Feeder suspension clamp 5353
Flat laying steady arm 5571

Resistance
valid for all types, exclusive for type 8
$F1_{Rd}$ (kN) = 1
$F2_{Rd}$ (kN) = 4


Drawing number
353.00352 - .00352-6, 451.00360

Ordering information
with pulley for Kevlar rope ø 10 mm
2189.2.2 Insulated suspension for cross span, long, 1.5 kV


2189.1

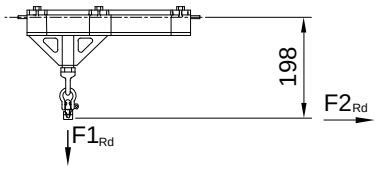


2189.2.1 / 2198.2.2




2189.3




2189.4




2189.5



2189.6



2189.7



2189.8

