

Material

Al, Fe stainless

Type	Electric load (A)	Wt (kg)
1	< 2000 A	57
2	> 2000 A - 3100 A	58

Note

Expansion movement +/- 500 mm

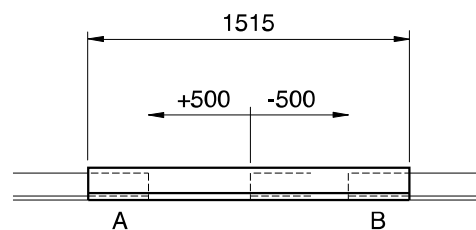
A = fix part

B = movable part

Possible contact wire

normal strength Copper 4622.x.1.107

Valthermo 4622.x.6.107 / .6.120 / .6.150

**Drawing number**

962.00892, .00919

Ordering information**Example 1**

Conductor rail expansion joint electric load < 2000 A

with contact wire 107 mm²

4622.1.1.107 Conductor rail expansion joint

Example 2

Conductor rail expansion joint electric load < 2000 A

without contact wire

4622.1 Conductor rail expansion joint