
Material
Al, Fe stainless

Type	Electric load (A)	Wt (kg)
1	< 2000 A	57
2	> 2000 A - 3100 A	58

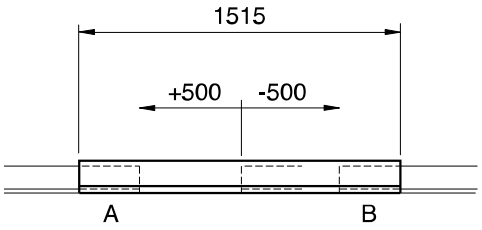

Note
Expansion movement +/- 500 mm
A = fix part
B = movable part
Possible contact wire
normal strength Copper 4622.x.1.107
Valthermo 4622.x.6.107 / .6.120 / .6.150

Drawing number
962.00892, .00919

Ordering information
Example 1
Conductor rail expansion joint electric load < 2000 A
with contact wire 107 mm^2
4622.1.1.107 Conductor rail expansion joint

Example 2
Conductor rail expansion joint electric load < 2000 A
without contact wire
4622.1 Conductor rail expansion joint