



- Boom lengths 5.00 m - 13.00 m
- Static proof for fondation and mast is required in any case
- Static proof for the cantilever is required for actions deviating from the table values

Type 95 - 130

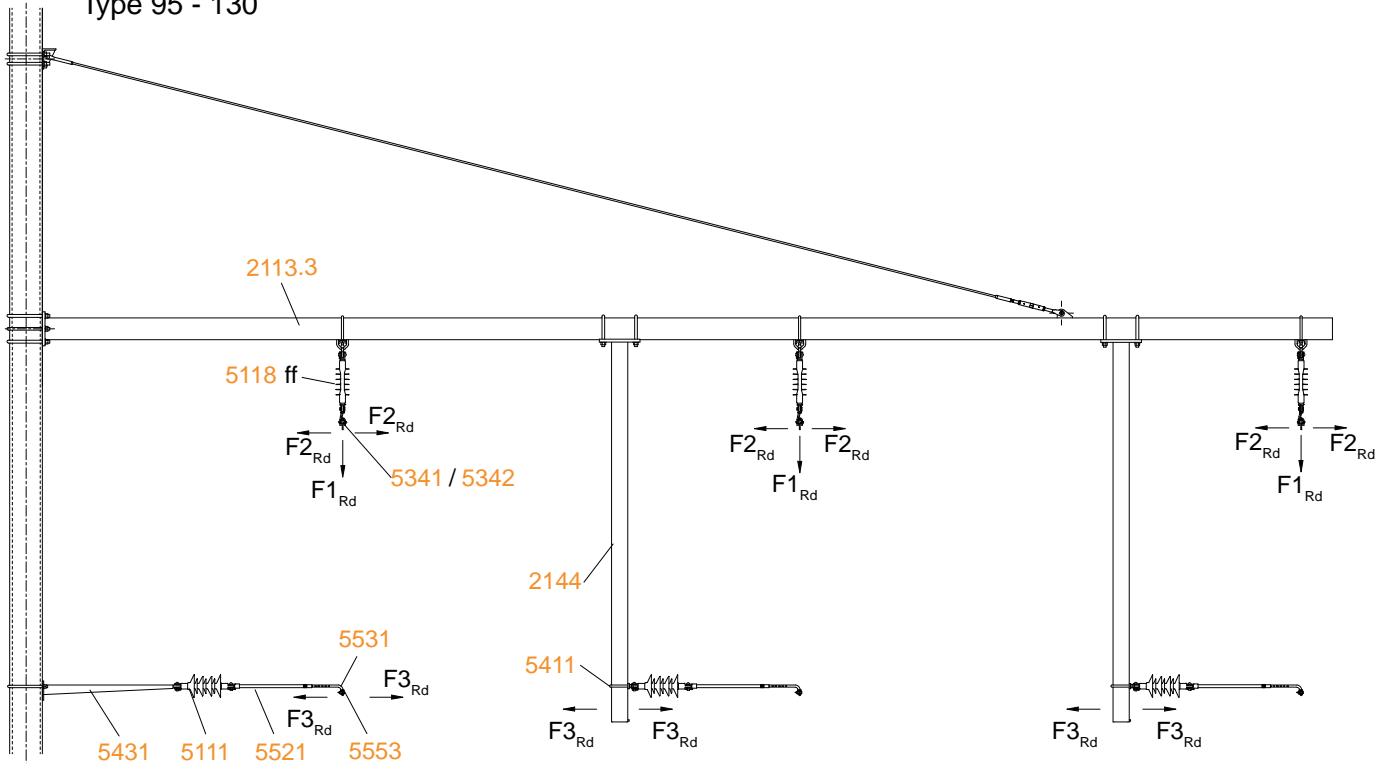

Type 50 - 90

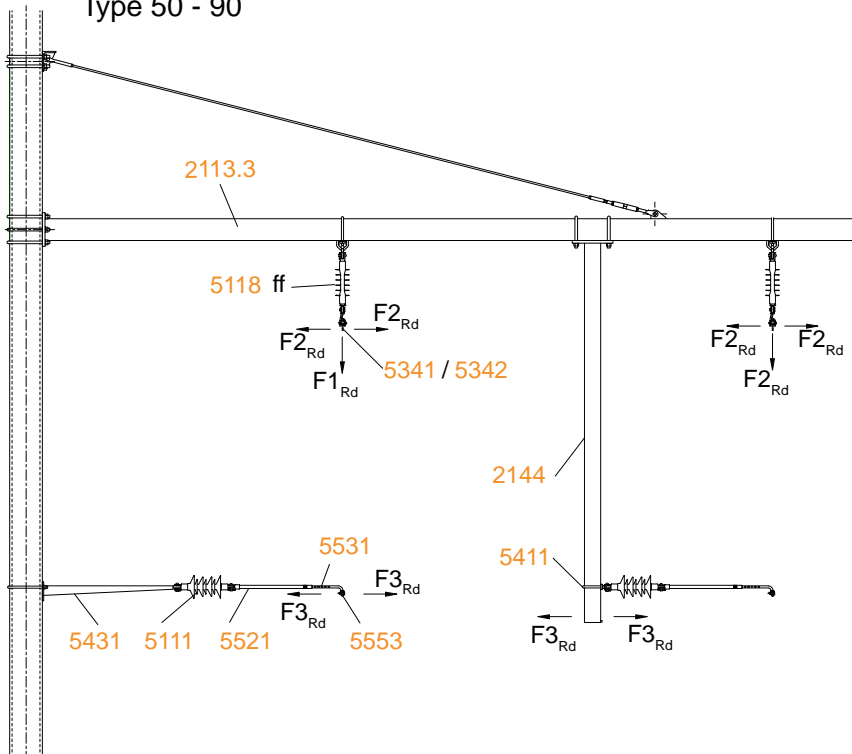

Resistance:

Type	F1 (kN)	F2 (kN)	F3 (kN)
50	3,30	1,70	1,70
55	3,30	2,00	2,00
60	3,30	2,70	2,70
65	3,30	3,40	3,40
70	3,30	3,40	3,40
75	3,30	4,00	4,00
80	3,30	4,00	4,00
85	3,30	4,00	4,00
90	3,30	4,00	4,00
95	2,20	4,00	4,00
100	2,20	4,00	4,00
105	2,20	4,00	4,00
110	2,20	4,00	4,00
115	2,20	4,00	4,00
120	2,20	4,00	4,00
125	2,20	4,00	4,00
130	2,20	4,00	4,00